


$D \wedge I L \vee$



Daily START - Diesel Euro VI/C

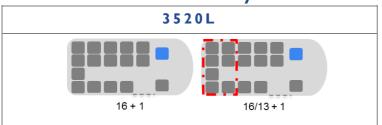

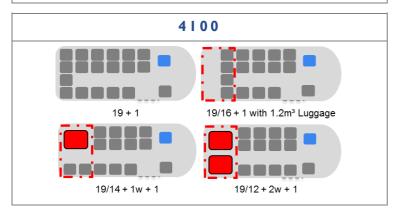

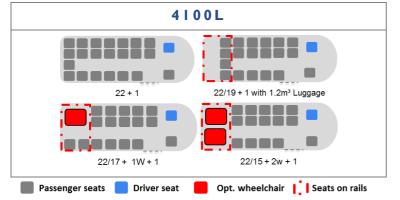

WHEELBASE (mm)	3520L	4100	4100L	
LENGTH (mm)	5963	7128	7498	
WIDTH (mm)	2052	2052	2174	
OVERALL HEIGHT (mm)	2900 2950			
INTERNAL HEIGHT (mm)	1820			
FRONT OVERHANG (mm)	1008			
REAR OVERHANG (mm)	1435	2020	2390	
FRONT TRACK (mm)	1724	1724	1723	
REAR TRACK (mm)	1540	1540	1661	
TURNING DIAMETER WALL TO WALL (mm)	13366	15190	14758	
TURNING DIAMETER KERB TO KERB (mm)	12744	14564	14108	
WEIGHTS				
MODEL	40C	50C	60C	
GROSS VEHICLE MASS (kg)	4500	5600	6100	
FRONT AXLE PLATED MASS (kg)	2100	2100	2200	
REAR AXLE PLATED MASS (kg)	3100	3700	4200	

FIC EURO VI/C			
MAX POWER	132 kW (180 hp) @ 3500 rpm	107 kW (150 hp) @ 3500 rpm	
MAX TORQUE	430 Nm @ 1350 - 3000 rpm	350 Nm @ 1500 - 2900 rpm	
DISPLACEMENT	3.0 liters		
4 In-Line cylinders. Unijet Common Rail			

June 2018



BODYWORK / EXTERIOR EQUIPMENT

Anti-corrosion protection by full cataphoretic dipping

C-section chassis frames linked by tubular cross members

Passenger glazed manual load side sliding door

Heated electric rearview mirrors with integrated direction indicators

Retractable step

Optional:

- Metallic paint
- Emergency lights operated when the door is opened
- A/C exterior case of same body color

INTERIOR EQUIPMENT

Wooden floor with aluminium finishing

Floor carpet in anti-slip PVC

Thermoformed roof passenger compartment

Leather imitation side wall covering

ABS window frames covering

Luggage racks on both sides w/ white/blue lighting

Glazed manual roof escape hatch

Fixed passenger seat with velvet upholstery

Partition wall on first raw of seats

Separation wall behind driver

Optional:

• Glazed electric roof escape hatch

ELECTRICAL SYSTEM

CAN-bus system with Bodybuilder connector

12 V - I I O Ah Battery

150 A Alternator

Daylights, rear fog lights and 3° stop light

Optional:

- 180 A Alternator
- 210 A Alternator
- · Emergency central switch
- · Fog lights with cornering

WINDOWS / THERMAL COMFORT

Athermal windscreen, single glazing windows

Thermo-acoustic insulation for roof and side panels

Driver's place exchange heater driven by 4-speed fun with distribution and recirculation mode

Passenger heating convector on left hand side

Optional:

- Heated windscreen
- N.2 heating convectors on left hand side
- Manual or automatic A/C for the driver and passenger throughout air vents in the luggage racks
- 2 Convector heater on left side
- Reheating function

DRIVER COMPARTMENT

Soft touch steering wheel: adjustable in height, 390 mm diameter

Suspended adjustable driver' seat

Radio preparation

Driver's airbag

Open storage compartment

Dividing wall behind the seat

Digital tachograph

LDWS (Lane Departure Warning System)

Optional:

- Suspended adjustable driver seat with lumbar support and heating function
- Cruise control
- Radio CD/DVD
- Steering wheel functions
- DAB Radio
- Open storage compartment with induction charging and USB
- Parking sensors
- Digital clock

ENGINE

Iveco FIC EURO VI Step C

Overall displacement: 2998 cc.

Longitudinal frontal position

Diesel, 4 In-Line cylinders

Injection type: Unijet common rail - 16 valves

Type of turbocharging: VGT (132 kW), WG (107 kW)

DOC + DPF (diesel oxidation catalyst and particulate filter)

Exhaust after-treatment system: EGR + SCR

Optional:

• HVO (Hydrogenated Vegetable Oil)

GEARBOX

FPT 2840.6 6-speed manual gearbox

Optional:

ZF Hi-Matic 8HP

REAR AXLE

Rigid, simple reduction

Double wheels

Rear axle ratios: 4.30 / 4.556 / 5.13

Optional:

• Differential lock

FRONT AXLE / STEERING

Independent wheels

Power steering

SUSPENSION

Front

QUADTOR with torsion bar and hydraulic telescopic shock absorbers

Rear

Mechanical suspension with dual-leaf parabolic springs and hydraulic telescopic

shock absorbers

Optional:

• Rear air suspension (WABCO - ECAS)

BRAKING SYSTEM

ESP9: includes ABS, ASR, EBD, Hill Holder (HHC), understeering control, emergency braking assistant (HBA), hydraulic fading compensation (HFC)

Service brake: vacuum assisted hydraulic brake, independent circuits for front and rear axle

Front and rear disc brakes with pads wear sensors

Emergency brake: integrated with the service brake

Parking brake: mechanical, manual, acting on the rear wheels

AEBS Optional:

• Telma retarder

FUFI TANK

90 lt diesel tank

25 lt AdBlue tank

• 100 lt diesel tank

TYRES

Optional:

195/75R16 IC 110/108

Optional:

- Spare wheel with carrier
- Inflation Kit



notice

DTDMT0618

veco Bus – Via Puglia, 35 – 10156 Torino