


DAILY




Chassis Cowl 65C/70C – Diesel Euro VI/C

Chassis Cowl

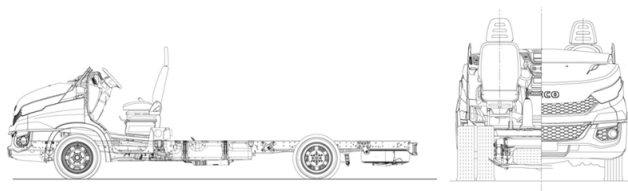

Stripped Chassis Cowl

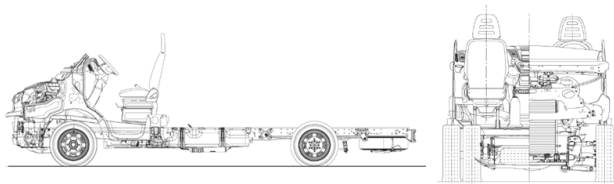

WHEELBASE (mm)	3750	4100	4350	4750	5100
LENGTH (mm)	6423	6823	7243	8108	8108
WIDTH (mm)	2052				
FRONT OVERHANG (mm)	1008				
REAR OVERHANG (mm)	1665	1715	1885	2350	2000
FRONT TRACK (mm)	1725				
REAR TRACK (mm)	1660				
TURNING DIAMETER WALL TO WALL (mm)	13694	14758	15518	16734	17790
TURNING DIAMETER KERB TO KERB (mm)	13048	14108	14866	16078	17162
WEIGHTS					
MODEL	65C		70C		
GROSS VEHICLE MASS (kg)	6500		7200		
FRONT AXLE PLATED MASS (kg)	2300		2500		
REAR AXLE PLATED MASS (kg)	5000		5350		

FIC EURO VI/C	
MAX POWER	132 kW (180 hp) @ 3500 rpm
MAX TORQUE	430 Nm @ 1350 - 3000 rpm
DISPLACEMENT	3.0 liters
4 In-Line cylinders. Unijet Common Rail	

BODYWORK / EXTERIOR EQUIPMENT

Anti-corrosion protection by full cathaphoretic dipping
 C-section chassis frames linked by tubular cross members
 Covering canvas for cab protection
 Heated electric rearview mirrors with integrated direction indicators
 Black calender

Optional:

- Chromed calender (With HI-Matic)

ELECTRICAL SYSTEM

CAN-bus system with Bodybuilder connector
 12 V – 110 Ah Battery
 180 A Alternator
 Daylights
 Remote central locking
 CAN open interface with bodybuilder connector

Optional:

- 210 A Alternator
- Emergency central switch
- Front fog lights with cornering function
- Auto battery cut-off
- Anti-theft with remote central locking
- Third key with remote control
- 13-pin DIN electric socket
- Headlight washers

WINDOWS / THERMAL COMFORT

Driver's place exchange heater driven by 4-speed fan with distribution and recirculation mode
 Connection for passenger heating

Optional:

- Additional heater
- 170cc A/C compressor
- Manual or automatic A/C for driver's compartment
- Connection for passengers heating and additional heater

DRIVER COMPARTMENT

Soft-touch steering wheel: adjustable in height, 390 mm diameter
 Matrix body computer
 Black dashboard
 Open storage compartment
 3 degree suspended adjustable driver seat with lumbar adjustment
 Heated electric mirrors
 Digital tachograph
 Radio preparation

Optional:

- Leather-trimmed steering wheel
- Steering wheel controls
- Rich dashboard (Blue color)
- Open storage compartment with USB
- Storage compartment with induction charger and USB
- Heated suspended adjustable driver seat
- Textile headrest
- Cruise control
- Reverse buzzer
- Radio CD with Blue Tooth
- Digital radio (DAB)
- DAB Radio with Apps
- IVECONNECT Navigation

ENGINE

Iveco FIC EURO VI Step C
 Overall displacement: 2998 cc.
 Longitudinal frontal position
 Diesel, 4 In-Line cylinders
 Injection type: Unijet common rail - 16 valves
 Type of turbocharging : VGT (Variable Geometry Turbocharger)
 Engine preheating
 DOC + DPF (diesel oxidation catalyst and particulate filter)
 Exhaust after-treatment system: EGR + SCR

Optional:

- HVO (Hydrogenated Vegetable Oil)

GEARBOX

FPT 2840.6 Overdrive mechanical gearbox , 6 gears and reverse
 Single dry plate , pull type clutch, with automatic adjustment

Optional:

- ZF Hi-Matic 8HP

REAR AXLE

Rigid, simple reduction
 Double wheels
 Rear axle ratios: 4.30

Optional:

- Rear axle ratio : 4.556/5.13
- Differential lock

FRONT AXLE / STEERING

Independent wheels
 Power steering

SUSPENSION

Front:
 QUADTOR with torsion bar and hydraulic telescopic shock absorbers
 Rear:
 Mechanical suspension with dual-leaf parabolic springs and hydraulic telescopic shock absorbers

Optional:

- Air suspension (WABCO – ECAS)

BRAKING SYSTEM

ESP9: includes ABS, ASR, EBD, Hill Holder (HHC), understeering control, emergency braking assistant (HBA), hydraulic fading compensation (HFC)
 Service brake: vacuum assisted hydraulic brake, independent circuits for front and rear axle
 Front and rear disc brakes with pads wear sensors
 Emergency brake: integrated with the service brake
 Parking brake: mechanical, manual, acting on the rear wheels
 Telma retarder (mandatory only on the 70C with mechanical gearbox)

Optional:

- Air suspension (WABCO – ECAS)
- Without AEBS

FUEL TANK

70 liters shaped diesel tank
 24 liters AdBlue tank

Optional:

- 90 liters diesel tank
- 100 liters diesel tank

TYRES

225/75 R16
 Spare wheel
 Spare wheel with carrier

Optional:

- Inflation Kit