
DAILV



Daily Tourys Plus - Diesel Euro VI/C



Driver

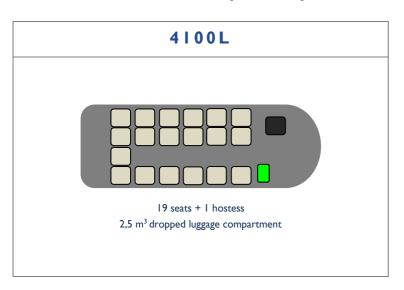

HI . MATIC

Passenger seat



Hostess (h)

WHEELBASE (mm)	4100L	
LENGTH (mm)	7515	
WIDTH (mm)	2174	
OVERALL HEIGHT (mm)	3090	
INTERNAL HEIGHT (mm)	2010	
FRONT OVERHANG (mm)	1008	
REAR OVERHANG (mm)	2407	
FRONT TRACK (mm)	1725	
REAR TRACK (mm)	1661	
TURNING DIAMETER WALL TO WALL (mm)	14758	
TURNING DIAMETER KERB TO KERB (mm)	14108	
WEIGHTS		
	65C	
GROSS VEHICLE MASS (kg)	6500	
FRONT AXLE PLATED MASS (kg)	2300	
REAR AXLE PLATED MASS (kg)	5000	

FIC EURO VI/C	
MAX POWER	132 kW (180 hp)
	@ 3500 rpm
MAX TORQUE	430 Nm
	@ 1350 - 3000 rpm
DISPLACEMENT	3.0 liters
4 In-Line cylinders. Unijet Common Rail	





BODYWORK / EXTERIOR EQUIPMENT

Anti-corrosion protection by full cataphoretic dipping

C-section chassis frames linked by tubular cross members

Passenger electric door: backward plug door with anti-squash protection

Rear pantograph tailgate

Heated electic rearview mirrors with integrated direction indicators

LED footwell illumination (entry step)

A/C exterior case of same body color

Chromed calender

Emergency lights operated when the door is opened

Optional:

- Heated electric plug door
- Metallic paint

INTERIOR EQUIPMENT

Floor carpet in anti-slip PVC

Low side panels finished with soft touch material matched with seat upholstery

Luggage racks on both sides with LED lighting

Glazed electric roof escape hatch

Comfort reclining passenger seat, two-tone micromotion, handle, footrest, magazine

net, armrest on aisle side, 3-point belts for all seats, installation on podium

Separation panel in front of 1st row

Optional:

- Passenger seat leather trimmed
- Hostess seat leather-trimmed
- Fridge

ELECTRICAL SYSTEM

CAN-bus system with Bodybuilder connector

12 V - 110 Ah Battery

180 A Alternator

Daylights, rear fog lights and 3° stop light

Fog light with cornering

Optional:

- 210 A Alternator
- Emergency central switch
- · High beam control

WINDOWS / THERMAL COMFORT

Heated windscreen

Thermoacoustic insulation for roof and side panels

Driver's place exchange heater driven by 4-speed fun with distribution and recirculation mode

Passenger heating through air channels on both sides

Automatic A/C for the driver and passenger throughout air vents in the luggage racks

- Darkened glued double glazing windows
- · A/C with reheating for the passenger

DRIVER COMPARTMENT

Leather-trimmed steering wheel: adjustable in height, 390 mm diameter

Suspended adjustable driver seat with lumbar support and heating function

Steering wheel controls

Driver's airbag

Electrically operated front window on driver's side

Open storage compartment

No dividing wall behind the driver seat

Digital tachograph

Cruise control

LDWS (Lane Departure Warning System)

Reverse buzzer

Preparation for rearview camera (integrated with 3° stop light)

Radio CD with Blue Tooth

Optional:

- DAB Radio
- DAB Radio with Apps

- Microphone
- Multimedia system

ENGINE

Iveco FIC EURO VI Step C

Overall displacement: 2998 cc.

Longitudinal frontal position

Diesel, 4 In-Line cylinders

Injection type: Unijet common rail - 16 valves

Suction: VGT (Variable Geometry Turbocharger)

Engine preheating

DOC + DPF (diesel oxidation catalyst and particulate filter)

Exhaust after-treatment system: EGR + SCR

Optional:

• HVO (Hydrogenated Vegetable Oil)

GEARBOX

ZF Hi-Matic 8HP

REAR AXLE

Rigid, simple reduction

Double wheels

Rear axle ratios: 4.30

Optional:

- Differential lock
- Rear axle ratios: 4.556 / 5.13

FRONT AXLE / STEERING

Independent wheels

Power steering

SUSPENSION

Front:

QUADTOR with torsion bar and hydraulic telescopic shock absorbers

Rear:

Air suspension (WABCO - ECAS)

BRAKING SYSTEM

ESP9: includes ABS, ASR, EBD, Hill Holder (HHC), understeering control, emergency braking assistant (HBA), hydraulic fading compensation (HFC)

Service brake: vacuum assisted hydraulic brake, independent circuits for front and rear

Front and rear disc brakes with pads wear sensors

Emergency brake: integrated with the service brake

Parking brake: mechanical, manual, acting on the rear wheels

Optional: Telma retarder

FUEL TANK

100 liters diesel tank (90 liters for RHD)

24 liters AdBlue tank

TYRES

225/75 R 16 On Road

Spare wheel

Optional: Inflation Kit



Iveco Bus works with a constant evolution and reserves the right to make changes to its product without prior notice

DTDMT0618

veco Bus – Via Puglia, 35 – 10156 Torino